



PRODUCT GUIDE



BU CO

HARDWARE · BUILDWARE

LET'S BUILD TOGETHER



WATERBASED PLASTER PRIMER

Buco Waterbased Plaster Primer is an economy range paint which provides adhesion to suitable substrates for interior and exterior surfaces. This product has good alkali resistant and hiding power properties

PRODUCT USES

- New and previously painted surfaces. made from Cement Plaster, Concrete, Brickwork.
- Asbestos/Fibre Cement Fascias & Ceiling Boards.
- Not suitable for Gypsum Plaster.
- Interior & Exterior Walls

PRODUCT BENEFITS

- Quick Drying
- Alkali Resistant

TOOL CHECKLIST

- Paintbrush
- Paint Roller Trayset
- Plastic Drop Sheet
- Mutton Cloth
- Sandpaper
- Masking Tape
- Crack Filler
- Paint Scraper
- Stepladder

WATERBASED PLASTER PRIMER



SURFACE PREPARATION

New Surfaces: Surface/s must be thoroughly clean, dry and in sound condition before painting.

Concrete/Cement Plaster: Apply one coat of Buco Waterbased Plaster Primer followed by two topcoats in the desired finish.

Asbestos/Fibre Cement: Apply one coat of Buco Waterbased Plaster Primer followed by two topcoats in the desired finish.

Gypsum Plaster (Rhinolite): Not recommended.

Previously Painted Surfaces: Thoroughly clean and prepare surface by removing all dirt, grease, grime and flaking paint before painting. Lightly sand and apply one coat of Buco Waterbased Plaster Primer followed by two topcoats in the desired finish.

APPLICATION

Stir the contents thoroughly before use. This product should be applied without thinning. For consistency, ensure that batch numbers are the same on all cans. Apply this product with a paintbrush or (furpile / lambswool) paint roller and allow +/- 4 hours drying time between coats. Allow paint to cure (hard dry) for 7 days before attempting to clean the surface. Clean tools (brushes & rollers) with water immediately after use.

TECHNICAL DATA

TYPE	Acrylic Based PVA
FINISH	Matt
DRYING TIME @ 25°C	Touch Dry: +/- 1 Hour Hard Dry: +/- 4 Hours
RE-COATING TIME	+/- 4 Hours
VISCOSITY	112-120 Krebs units
SPECIFIC GRAVITY	1.35kg / litre
STORAGE	Dry and Cool area
PACK SIZE	5Lt; 20Lt

* Please refer to latest colour card for updated colours.

PRECAUTIONS

- Do not apply if rain is imminent.
- Apply at an ambient temperature of 5 to 35°C.
- Keep out of reach of children.
- Wash hands with water immediately after use.
- Skin or Eye contact: clean with fresh water and consult a physician if necessary.

QUALITY GUARANTEE

This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.

BU CO

HARDWARE · BUILDWARE

LET'S BUILD TOGETHER



CONTRACTORS ACRYLIC PVA

Buco Contractors Acrylic PVA is a quality paint, which has been developed specifically to decorate and protect all interior and exterior surfaces. This product has excellent filling and hiding power properties recommended for walls and ceilings.

PRODUCT USES

- New and previously painted surfaces made from Cement Plaster, Concrete, Brickwork & Gypsum Plaster.
- Asbestos/Fibre Cement Fascias & Ceiling Boards.
- Ideal for Interior & Exterior Walls & Ceilings.

PRODUCT BENEFITS

- Durable
- Quick Drying
- Good Hiding Power
- Soft Matt Finish

TOOL CHECKLIST

- Paintbrush
- Paint Roller
- Plastic Drop Sheet
- Mutton Cloth
- Sandpaper
- Masking Tape
- Crack Filler
- Paint Scraper
- Stepladder

SURFACE PREPARATION

New Surfaces: Surface/s must be thoroughly clean, dry and in sound condition before painting.

Concrete/Cement Plaster: Apply one coat of Buco Waterbased Plaster Primer, followed by two coats of Buco Contractors Acrylic PVA.

Asbestos/Fibre Cement: Apply one coat of Buco Waterbased Plaster Primer, followed by two coats of Buco Contractors Acrylic PVA.

Timber/Wood: Apply one coat of Wood Primer, followed by two coats of Buco Contractors Acrylic PVA

Iron & Steel: Clean and remove all grease and rust. Apply one coat of Steel Primer followed by two coats of Buco Contractors Acrylic PVA.

Previously Painted Surfaces: Thoroughly clean and prepare surface by removing all dirt, grease, grime and flaking paint before painting. Powdery surfaces must be treated with one coat of Plasterbond, prior to applying two coats of Buco Contractors Acrylic PVA.

Enamel based surfaces must be cleaned and prepared correctly. Sand lightly and apply one coat of Universal Undercoat, followed by two coats of Buco Contractors Acrylic PVA.

APPLICATION

Stir the contents thoroughly before use. This product should be applied without thinning. For colour consistency, ensure that batch numbers are the same on all cans. Apply this product with a paintbrush or (furpile / lambswool) paint roller and allow +/- 4 hours drying time between coats. Allow paint to cure (hard dry) for 7 days before attempting to clean the surface. Clean tools (brushes & rollers) with water immediately after use.

TECHNICAL DATA

TYPE	Acrylic Based PVA
FINISH	Matt
DRYING TIME @ 25°C	Touch Dry: +/- 30 Minutes Hard Dry: +/- 4 Hours
RE-COATING TIME	+/- 4 Hours
VISCOSITY	100-120 Krebs units
SPECIFIC GRAVITY	1.40kg / litre
STORAGE	Dry and Cool area
PACK SIZE	5Lt; 20Lt

* Please refer to latest colour card for updated colours.

PRECAUTIONS

- Do not apply if rain is imminent.
- Apply at an ambient temperature of 5 to 35°C.
- Keep out of reach of children.
- Wash hands with water immediately after use.
- Skin or Eye contact: clean with fresh water and consult a physician if necessary.

QUALITY GUARANTEE

This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.

BU CO

HARDWARE · BUILDWARE

LET'S BUILD TOGETHER



WALL & CEILING ACRYLIC PVA

Buco Wall & Ceiling Acrylic PVA is a good quality paint, which has been developed specifically to decorate and protect all interior and exterior surfaces. This product has excellent filling and hiding power properties recommended for walls and ceilings.

PRODUCT USES

- New and previously painted surfaces made from Cement Plaster, Concrete, Brickwork & Gypsum Plaster.
- Asbestos/Fibre Cement Fascias & Ceiling Boards.
- Ideal for Interior & Exterior Walls.

PRODUCT BENEFITS

- Excellent Durability
- Quick Drying
- Fully Washable
- Good Hiding Power

TOOL CHECKLIST

- Paintbrush
- Paint Roller Trayset
- Plastic Drop Sheet
- Mutton Cloth
- Sandpaper
- Masking Tape
- Crack Filler
- Paint Scraper
- Stepladder

WALL & CEILING ACRYLIC PVA



SURFACE PREPARATION

New Surfaces: Surface/s must be thoroughly clean, dry and in sound condition before painting.

Concrete/Cement Plaster: Apply one coat of Buco Waterbased Plaster Primer, followed by two coats of Buco Wall & Ceiling Acrylic PVA.

Asbestos/Fibre Cement: Apply one coat of Buco Waterbased Plaster Primer, followed by two coats of Buco Wall & Ceiling Acrylic PVA.

Previously Painted Surfaces: Thoroughly clean and prepare surface by removing all dirt, grease, grime and flaking paint before painting. Powdery surfaces must be treated with one coat of Plasterbond, prior to applying two coats of Buco Wall & Ceiling Acrylic PVA. Enamel based surfaces must be cleaned and prepared correctly. Sand lightly and apply by two coats of Buco Wall & Ceiling Acrylic PVA.

APPLICATION

Stir the contents thoroughly before use. This product should be applied without thinning. For colour consistency, ensure that batch numbers are the same on all cans. Apply this product with a paintbrush or (furpile / lambswool) paint roller, and allow +/- 4 hours drying time between coats. Allow paint to cure (hard dry) for 7 days before attempting to clean the surface. Do not apply when rain is imminent. Clean tools (brushes & rollers) with water immediately after use.

TECHNICAL DATA

TYPE	Acrylic Based PVA
FINISH	Matt
DRYING TIME @ 25°C	Touch Dry: +/- 30 Minutes Hard Dry: +/- 4 Hours
RE-COATING TIME	+/- 4 Hours
VISCOSITY	108-120 Krebs units
SPECIFIC GRAVITY	1.42kg / litre
STORAGE	Dry and Cool area
PACK SIZE	5Lt; 20Lt

* Please refer to latest colour card for updated colours.

PRECAUTIONS

- Do not apply if rain is imminent.
- Apply at an ambient temperature of 5 to 35°C.
- Keep out of reach of children.
- Wash hands with water immediately after use.
- Skin or eye contact: clean with fresh water and consult a physician if necessary.

QUALITY GUARANTEE

This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.

BU CO

HARDWARE · BUILDWARE

LET'S BUILD TOGETHER



ACRYLIC ROOF & PAVING PAINT

Buco Acrylic Roof & Paving Paint is a good quality paint that provides exterior durability combined with excellent alkali resistance. This product will provide complete protection against the harshest climatic conditions. It can be applied to Asbestos/Fibre Cement Tiles or Roof Sheets, Clay or Cement Roof Tiles and pre-primed Gavanised Iron Roofs.

PRODUCT USES

- Suitable for most types of Roofs & Paving.
- Concrete Window Sills & Garden Pots.
- Asbestos/Fibre Cement.
- Primed Metal & Wooden Surfaces.

PRODUCT BENEFITS

- Excellent UV Resistance
- Good Durability
- All-Weather Finish
- Excellent Hiding Power

TOOL CHECKLIST

- Paintbrush
- Paint Roller
- Plastic Drop Sheet
- Mutton Cloth
- Sandpaper
- Masking Tape
- Crack Filler
- Paint Scraper
- Stepladder

ACRYLIC ROOF & PAVING PAINT



SURFACE PREPARATION

New Surfaces: Thoroughly clean and prepare surface/s to be painted and use the correct primer prior to applying two coats of Buco Acrylic Roof & Paving paint.

Galvanised Iron: Clean and remove all grease with Galvanised Iron Cleaner and rinse off with water before applying one coat of Steel Primer, followed by two coats of Buco Acrylic Roof & Paving paint.

Asbestos/Cement Roof Tiles: This the first coat with 10% water (Prime Coat) followed by two coats of Buco Acrylic Roof & Paving paint.

Previously Painted Surfaces: Thoroughly clean and prepare surface/s by removing all dirt, grime, grease and flaking paint before painting. Apply two coats of Buco Acrylic Roof & Paving paint. Powdery surfaces must be treated with one coat of Plaster bond, before applying two coats of Buco Acrylic Roof & Paving paint.

APPLICATION

Stir the contents thoroughly before use. This product should be applied without thinning. For colour consistency, ensure that batch numbers are the same on all cans. Apply this product with a large paintbrush, block brush or (Furpile / Lambswool) paint roller and allow +/- 4 hours drying time between coats. Clean tools (brushes & rollers) with water immediately after use.

TECHNICAL DATA

TYPE	Acrylic
FINISH	Semi Sheen
DRYING TIME @ 25°C	Touch Dry: +/- 1 Hour Hard Dry: +/- 4 Hours
RE-COATING TIME	+/- 4 Hours
VISCOSITY	110 - 120 Kus
SPECIFIC GRAVITY	1.20kg / litre
STORAGE	Dry and Cool area
PACK SIZE	20Lt

* Please refer to latest colour card for updated colours.

PRECAUTIONS

- Do not apply if rain is imminent.
- Apply at an ambient temperature of 5 to 35°C.
- For best results paint between 08h00-12h00 and 15h00-17h00.
- Keep out of reach of children.
- Wash hands with water immediately after use.
- Skin or Eye contact: clean with fresh water and consult a physician if necessary.

QUALITY GUARANTEE

This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.

BU CO

HARDWARE · BUILDWARE

LET'S BUILD TOGETHER



ACRYLIC WATERPROOFING

Buco Acrylic Waterproofing is an economy grade acrylic waterproofing used in conjunction with a membrane, which has been especially formulated to seal and protect all exterior surfaces.

PRODUCT USES

- Waterproofing Roofs, Walls and Parapet Walls.
- Flashings, Roof Valleys, Overlapping Roof Sheets.
- Roof Screws and Weather Walls.
- Ideal for Galvanised Iron and Tiled roofs.

PRODUCT BENEFITS

- Non-Toxic (water-based)
- Provides Complete Protection
- Over-Coat with Water-Based Paints

TOOL CHECKLIST

- Paintbrush
- Paint Roller
- Plastic Drop Sheet
- Mutton Cloth
- Sandpaper
- Masking Tape
- Scissors
- Membrane
- Paint Scraper
- Stepladder

ACRYLIC WATERPROOFING



SURFACE PREPARATION

New Surfaces: Surface/s must be thoroughly clean, dry and in sound condition before commencing to waterproof.

Roofs, Parapets & Flashings: Apply one thick basecoat of Buco Acrylic Waterproofing to the surface. Place membrane firmly onto the basecoat and apply another coat while the treated surface area is still wet. Allow sufficient time to dry before applying the final coat of Buco Acrylic Waterproofing. Apply two coats of Buco Acrylic Roof & Paving paint (if necessary).

Cement Plastered Walls: Apply one thick basecoat of Buco Acrylic Waterproofing to the surface. Place membrane firmly onto the basecoat and apply another coat while the treated surface area is still wet. Allow sufficient time to dry before applying two final coats of a Buco Acrylic PVA (if necessary).

Previously Painted/Waterproofed Surfaces: Thoroughly clean and prepare surface/s by removing all dirt, grease, grime, surface rust, old waterproofing and flaking paint. Apply Buco Acrylic Waterproofing as described under New Surfaces. Powdery surfaces must be sealed with one coat of Plasterbond, prior to using this product.

APPLICATION

Stir the contents thoroughly before use. This product should be applied without thinning. For colour consistency, ensure that batch numbers are the same on all cans. Apply this product with a paintbrush and allow 4 to 6 hours drying time between coats. Clean tools (paintbrushes) with water immediately after use.

Warning: Ensure that the membrane is completely saturated with waterproofing liquid and applied correctly without creasing or entrapped air. Do not apply if rain is imminent or on surfaces with long-term ponding.

TECHNICAL DATA

TYPE	Styrene Acrylic
FINISH	Matt
DRYING TIME @ 25°C	Touch Dry: +/- 30 Minutes to 1 Hour Hard Dry: +/- 4 Hours
RE-COATING TIME	+/- 4-6 Hours
VISCOSITY	100-120 Krebs units
STORAGE	Dry and Cool area
PACK SIZE	5Lt

* Please refer to latest colour card for updated colours.

PRECAUTIONS

- Do not apply if rain is imminent or on surfaces with long-term ponding.
- Apply at an ambient temperature of 5 to 35°C.
- Keep out of reach of children.
- Wash hands with water immediately after use.
- Skin or Eye contact: clean with fresh water and consult a physician if necessary..

QUALITY GUARANTEE

This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.




CONTRACTORS ACRYLIC PVA



Grey



White

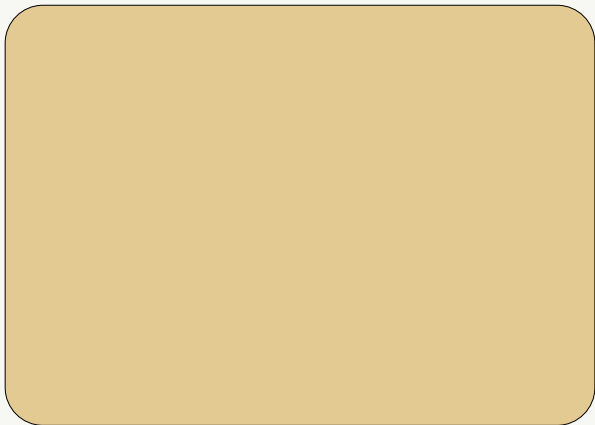

Cream



Peach



ACRYLIC ROOF & PAVING PAINT




Terra Cotta



Grey



Charcoal

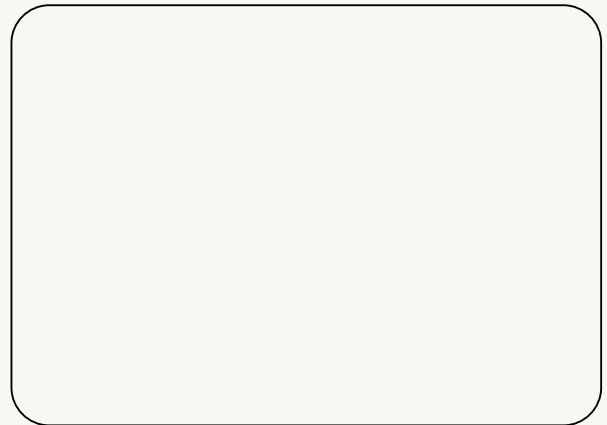

White



Red

Colours displayed on screen may vary from actual paint colours



ACRYLIC WATERPROOFING



White



Grey



Charcoal



Terra Cotta



Red

Colours displayed on screen may vary from actual paint colours



CUSTOMER CARE
0860 063 325

CONTACT US

JOHANNESBURG

Corner Main Reef Road & Kelvin
Street, Industria
Tel: +27 11 661 5700

CAPE TOWN

35 Assegaal Street,
Parow Industrial
Tel: +27 21 932 0685

DURBAN

59 Hunslet Road, Phoenix
Industrial Park, Phoenix
Tel: +27 32 459 1245

EAST LONDON

Cnr Glamorgan & Edison Roads,
Gately
Tel: +27 43 736 9011

Proudly Manufactured for Buco by:
Medal Paint (Pty) Ltd

